


Quick Menu Driven Programming

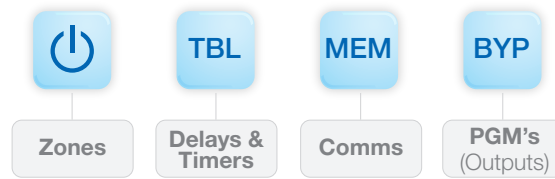
How to enter Quick Menu






1. Press the 

2. Installer code
(default: 0 0 0 0)

Select menu below

(tip : You can jump between menu's by pressing the keys below)



- Press **1** **For Monitoring Station Phone #**
ARM flashing  (flashing)
Enter Telephone # of monitoring station then press **ENTER**
----- Telephone # then press **ENTER**
Account Code
SLEEP flashing  (flashing)
(Enter four digit code) _ _ _ _
Report Format?
STAY flashing  (flashing)
Press **1** For CID
 OR
 2 For SIA
- Press **2** **For Backup Monitoring Station Phone #** (optional)
ARM flashing  (flashing)
Enter Telephone # of backup monitoring station
then press **ENTER**
----- Telephone # then press **ENTER**
- Press **3** **For Personal Dailer #1** (1 of 5 Phone#)
ARM flashing  (flashing)
Enter cell phone # of backup monitoring station
then press **ENTER**
----- Telephone # then press **ENTER**
- Press **4**
To
7 **For Personal Dailer number allocation #2 to #5**
Repeat same action as 3
- Press **8** **For Pager Dailer number allocation**
Repeat same action as 3
- Press **9** **To Cancel Comm's**
Press **9**
to cancel all communication, this resets the CALL BUFFER